


ISDT UC4 Smart Charger Instructions

Attention

1. Make sure the power supply voltage is compatible with this device .
2. This device will generate heat during working, keep it away from humidity and high temperature .
3. Children should not operate this device, never leave unattended .

Specifications

Type: UC4	Output current: 1.5A/port
Power input: USB Type-C	Output voltage: 4.2V
Input voltage: 5~9V	Battery charge port: PH 2.0
Max input power: 18W	Size: (L×W×H) 55.1 × 34.3 × 11.8mm

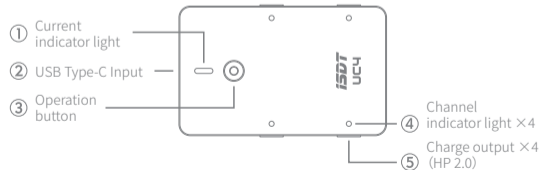

Description of key function

Press: prompt charging current set, corresponding color flashing prompt.

Press and hold(1 second): switch current setting, corresponding color flashing prompt.

Description of Current indicator light status

Light status	Description
White light single flash	Charge current setting 0.5A
Cyan light double flash	Charge current setting 1.0 A
Purple light triple flash	Charge current setting 1.5 A
Red light quick flash	System failure
Green light	After power on, the green light turns from steady to flash for 2 seconds, indicating that the input power supports QC protocol

NOTE:
 Max output current : 1.0A and 1.5A output can be chosen with QC adaptor.
 Max output current : 0.5A /channel with input power 5V

Description of Channel indicator light status

Light status	Description
Red light flash	Battery over-charge or abnormal work (over temperature or over capacity limit)
Green light on	Charging completed
Orange light flash	Charging, the number of lightning flashes corresponds to different battery capacity: 1: battery capacity < 40% 2: 40% < battery capacity < 70% 3: 70% < battery capacity < 100%
Light-off	No battery



www.isdt.co

*All pictures, statements and text information of this product are for reference only.
 Please refer to the actual information on the official website www.isdt.co.
 SHENZHEN ISD TECHNOLOGY CO.,LTD reserves the right for final explanation and modification of the specification.